
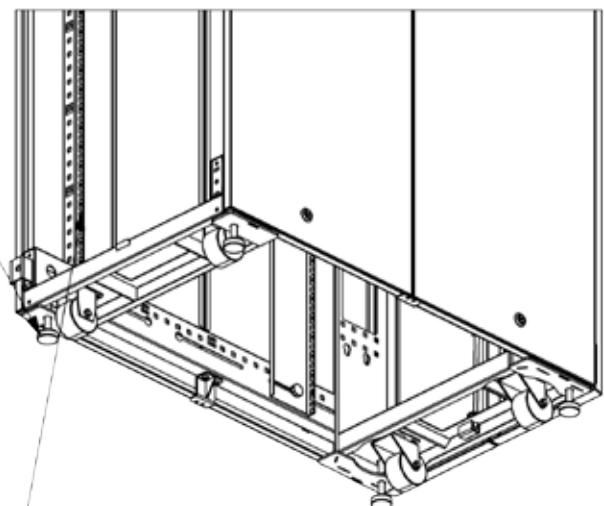


Quick Installation Guide

Data Center Cabinet

Please read and follow the following safe-install procedures:

1. Remove packaging and inspect the cabinet for shipping damage.
2. Open the front door, remove the silver lower shipping bracket, and raise the leveler feet about 1/4". Close the front door. Open the back door, remove the back lower shipping bracket, and raise the leveler feet about 1/4". Close the back doors and move the cabinet off the pallet.
3. If using the OCC Pallet Ramp, slide the ramp under the pallet at the FRONT of the cabinet. Carefully roll the cabinet down the ramp. Note that the rear casters can swivel, so be sure to control the back end of the cabinet so it does not rotate off the ramp.
4. Your OCC Data Center Cabinet is shipped with heavy duty casters and levelers pre-installed. Using a 1/2" wrench at the bottom of the leveler or a flat head screwdriver from the top, lower the levelers to 1/4" from the floor before moving the cabinet. This will prevent the cabinet from tipping if you hit an obstruction while rolling it into position. Avoid sudden stops, excessive force, and uneven surfaces.
5. Unload equipment before moving the cabinet.
6. Use the leveler legs to level your cabinet before installing equipment.

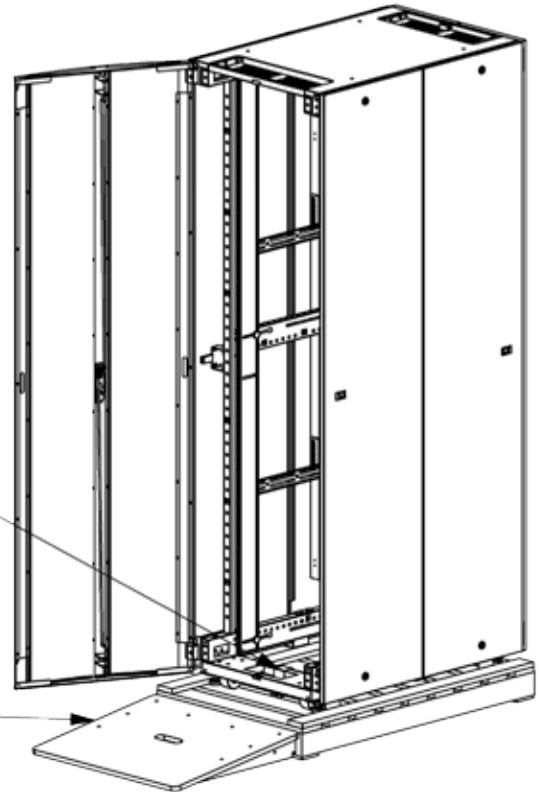

Bottom Front View
with Door Removed