


Thank You for choosing the FC-SCK-LC-125 product. The FC-SCK-LC-125 is a high-performance product that is designed for cleaning the ferrule & faces of adapters & connectors (LC and MU) with UPC and APC polishing criteria. Please carefully read these instructions before using this FC-SCK-LC-125 product. Please keep these instructions for future reference.

1. SAFETY PRECAUTIONS

	Though our FC-SCK-LC-125 is deemed safe, improper usage or handling can still inflict injury to others.
	FC-SCK-LC-125 is designed to clean LCMU adapters & connectors only. Optical Cable Corporation is not liable for damage caused in attempting to apply this product to other applications.


2. NOTES ON USAGE







DO NOT attempt to disassemble as this can cause damage to the product and void warranty.
DO NOT try to re-use cleaning cloth as this will eliminate the cleaner's effectiveness and void warranty.
DO NOT touch the cleaning cloth as this will cause contamination.
DO NOT pull the cleaning cloth, use only the FC-SCK-LC-125 product's body.
DO NOT use this fiber cleaner when the cloth is empty. This may cause damage to adapters & connectors.

3. NOTES ON STORAGE FOR EXTENDED PERIODS

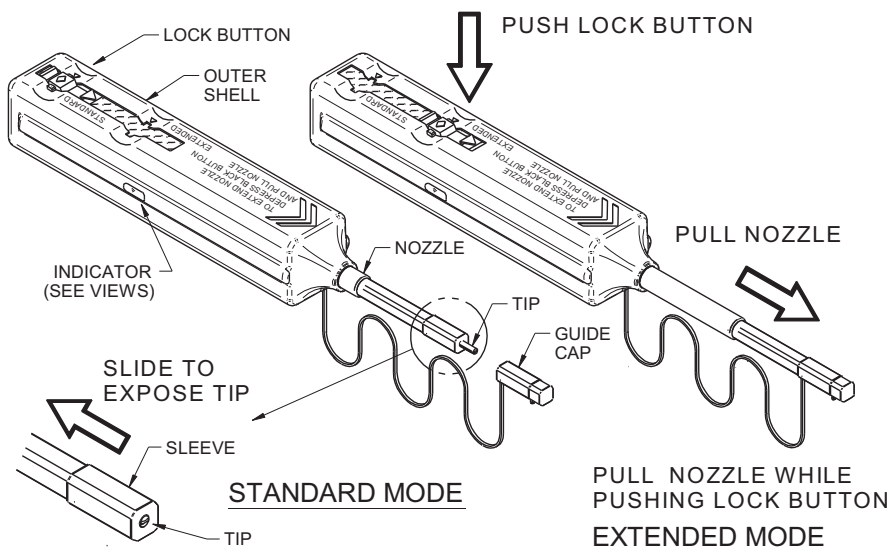
DO NOT leave the cleaner exposed to direct sunlight, high temperature, or high humidity over an extended period of time. The dust cover should be closed at all times when product is not in use.

4. FIBER CLEANER CONSTRUCTION



	VIEW OF INDICATOR	VIEW OF THE NOZZLE END
FULL		
LITTLE		
EMPTY		

IDENTIFICATION OF REMAINING CLOTH

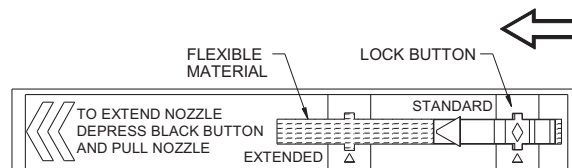


DETAIL OF THE TOP OF UNIT

PART NAME	FUNCTION
TIP	To lead the cleaning cloth to the optical connector and face.
NOZZLE	For leading the TIP to the optical connector and face.
LOCK BUTTON	Push the LOCK BUTTON to extend and contact the NOZZLE.
OUTER SHELL	Used to push the OUTER SHELL to clean the connector.
GUIDE CAP	Acts as a dust cap or cleaning adapter for connector plug.
INDICATOR	Provides indication of remaining cleaning cloth.


5. APPLICATIONS

Connector Inside Adapter

1. Remove GUIDE CAP from the fiber cleaner FC-SCK-LC-125

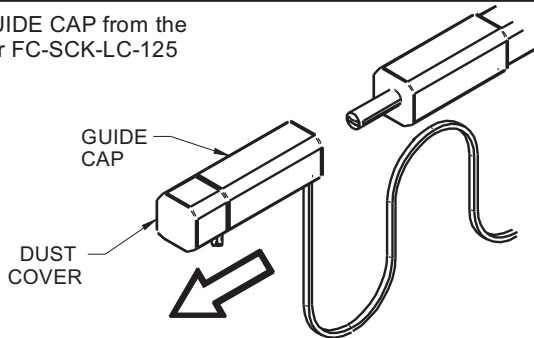

2. Insert TIP of cleaner into the LC ADAPTER.

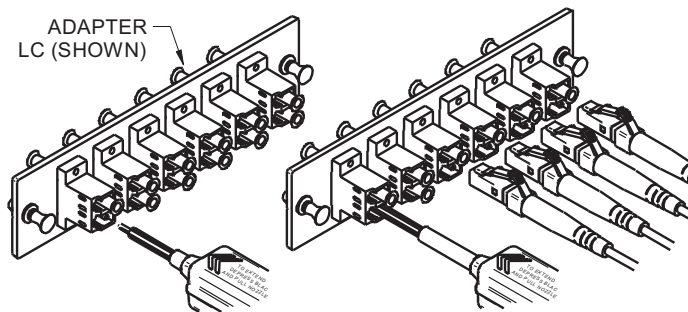


STANDARD MODE

EXTENDED MODE

NOTE: This drawing shows only the LC ADAPTERS.
This product can also clean the MU ADAPTERS.

3. Push the OUTER SHELL to start cleaning the LC ADAPTER end face. A "POP!!" sound indicates end of cleaning process. Close the DUST COVER after use.

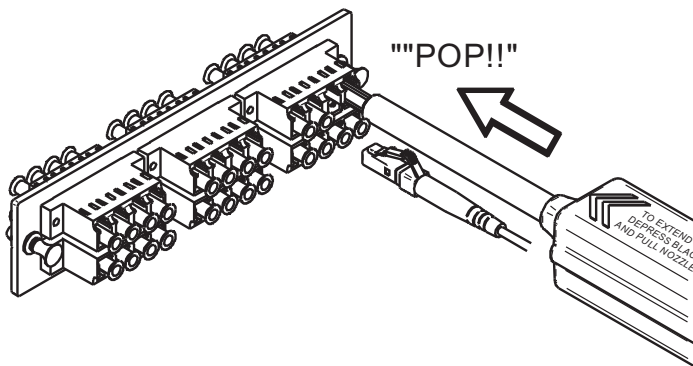


Be careful not to slant the FC-SCK-LC-125 while inserting into the ADAPTER.

Do not overly exert force during insertion as this may cause damage to both the ADAPTER and the FC-SCK-LC-125


If pushing OUTER SHELL is inhibited, remove FC-SCK-LC-125 from the ADAPTER and ensure that there is no sizeable debris inhibiting the cleaning process.

Connector Plug Alone

1. Open the DUST COVER on the GUIDE CAP.

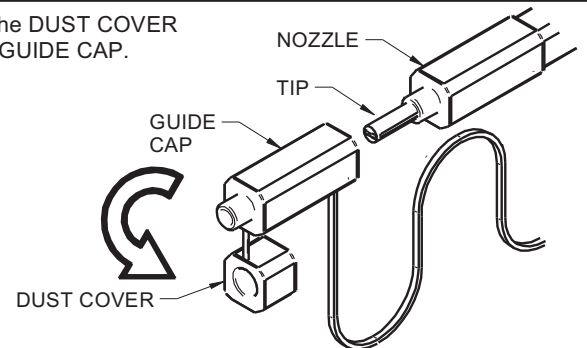


2. Insert LC CONNECTOR into the GUIDE CAP.

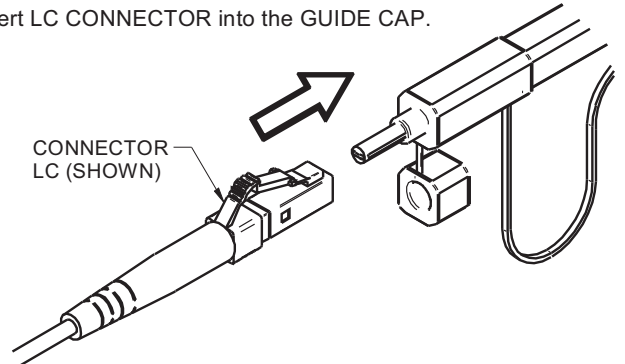

NOTE: This drawing shows only the LC CONNECTORS.
This product can also clean MU CONNECTORS.

3. Push the OUTER SHELL to start cleaning the SC CONNECTOR end face. A "POP!!" sound indicates end of cleaning process.

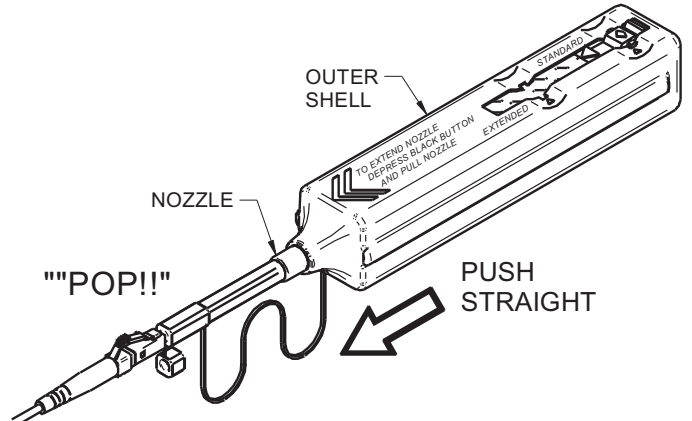

Be careful not to slant the CONNECTOR while inserting into the FC-SCK-LC-125

Do not overly exert force during insertion as this may cause damage to both the CONNECTOR and the FC-SCK-LC-125

If pushing OUTER SHELL is inhibited, remove FC-SCK-LC-125 from the CONNECTOR and ensure that there is no sizeable debris inhibiting the cleaning process.