
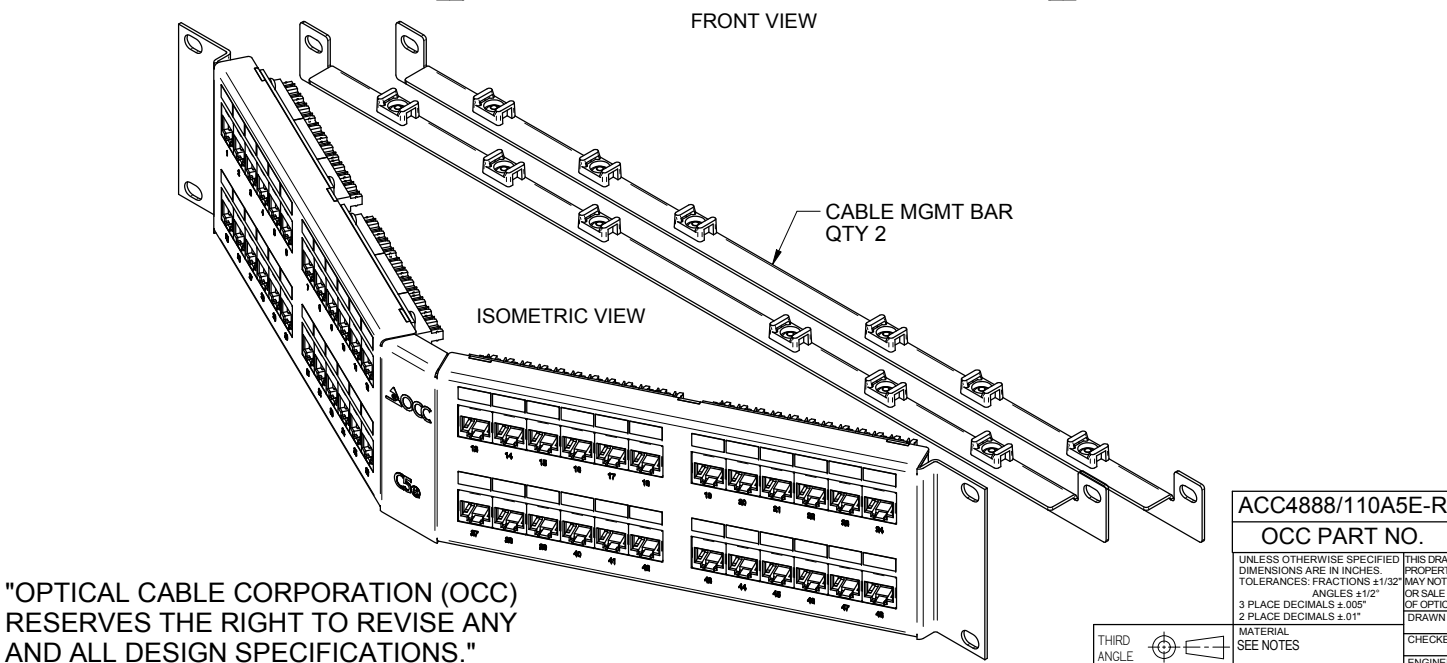


APPLICATIONS:
 - ANALOG VOICE / VOIP / IPTV
 - 10 / 100 / 1000 BASE-T ETHERNET
 - IEEE 802.3 AF / AT PoE



SPECIFICATIONS:
 - ANSI / TIA-568-C.2 CATEGORY 5e
 - ANSI / TIA-968-A
 - IEC 60603-7

MATERIALS:
 - PANEL: BLACK POWDER COAT, 16 AWG STEEL
 - CABLE MANAGEMENT BARS, BLACK POWDER COAT, 16 AWG STEEL

- KIT INCLUDES THE FOLLOWING:
 - (12) 3.6 " NYLON CABLE TIES
 - (8) BLACK 12-24 PAN HEAD SCREWS
 - (2) CABLE MANAGEMENT BAR

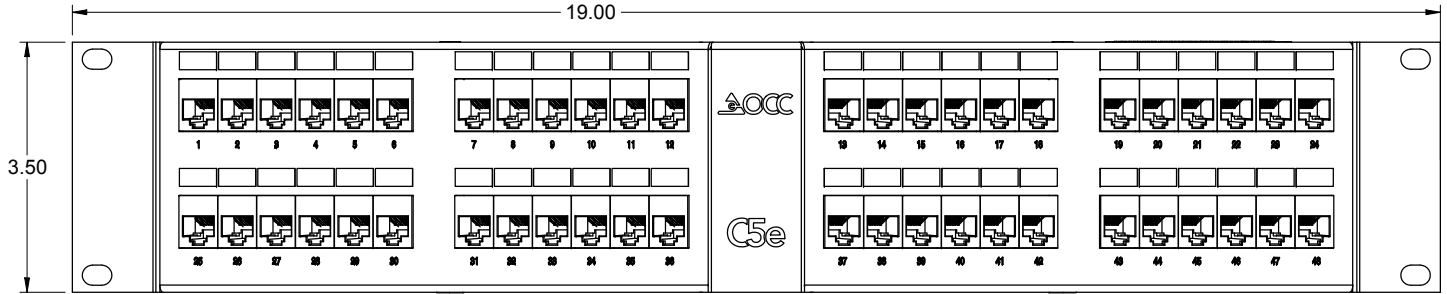

8 POSITION MODULAR JACK

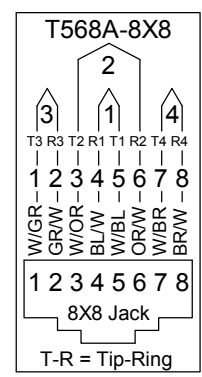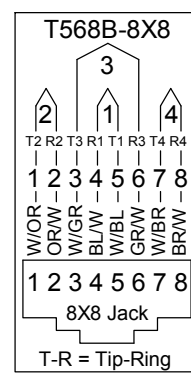

"OPTICAL CABLE CORPORATION (OCC) RESERVES THE RIGHT TO REVISE ANY AND ALL DESIGN SPECIFICATIONS."
UNCONTROLLED COPY

ACC4888/110A5E-R		PATCH PANEL, 48 PORT, ANGLED, CAT 5e, 2U	
OCC PART NO.		DESCRIPTION	
<small>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2" 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"</small>		<small>THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.</small>	
<small>MATERIAL SEE NOTES</small>		<small>DRAWN D.A.HOLBERT DATE 5/17/13</small>	
<small>THIRD ANGLE PROJECTION</small>		<small>CHECKED S.PORACH DATE 5/20/13</small>	
<small>CRITICAL DIMENSION CODE</small>		<small>ENGINEER J.YANIK DATE 5/17/13</small>	
<small>(F) = FUNCTION</small>		<small>APPROVED J.CALLOWAY DATE 1/20/15</small>	
<small>(M) = MATING</small>		<small>PREVIOUS DWG</small>	
<small>(A) = AUDIT</small>		<small>FINISH SEE NOTES</small>	
		<small>FILENAME C111492A.dft</small>	
		<small>SCALE: NONE</small>	
		<small>SHEET 1 OF 1</small>	
		<small>REV A</small>	



DWG TITLE: PATCH PANEL, ANGLED, 48 PORT, CAT 5e, 2U
 SIZE C DWG NO. C111492