
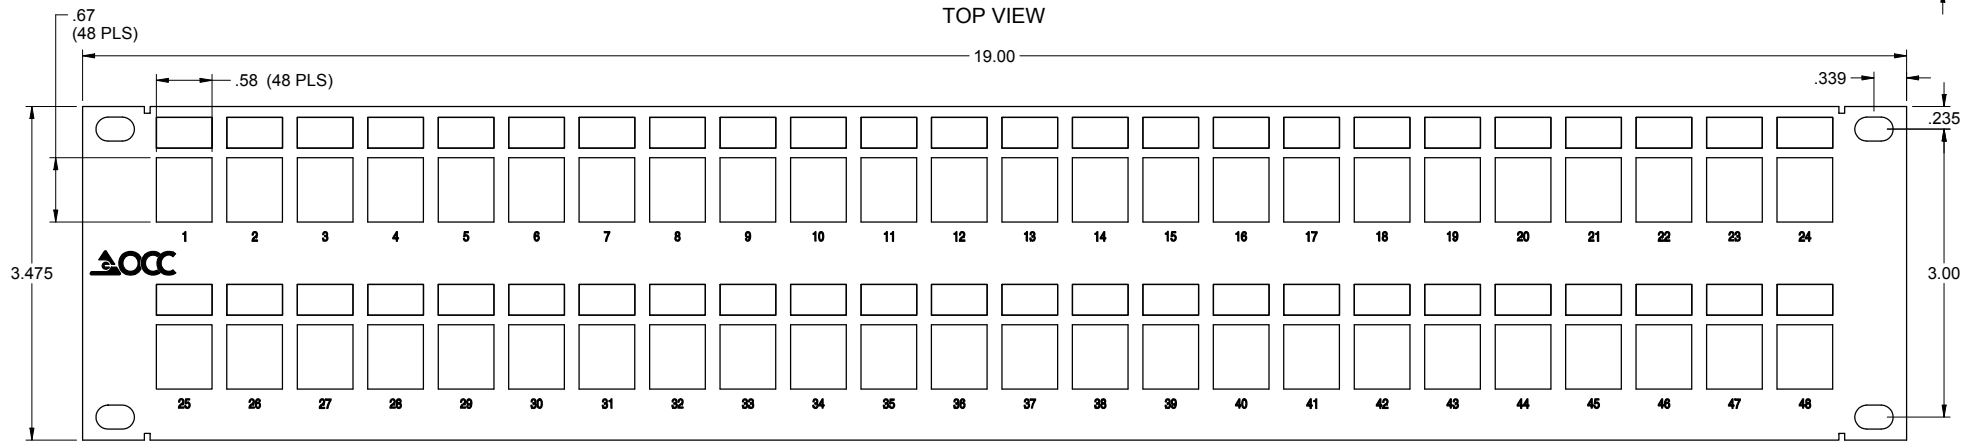


REVISION HISTORY					
REV	SHT	DESCRIPTION	DATE	ECN	CHECKED
A	ALL	RELEASE NEW	7/16/01	NEW	RBS
B	-	REVISED: PANEL DESIGN	9/25/06	-	JH
C	-	UPDATED: OCC LOGO	5/13/13	-	JC

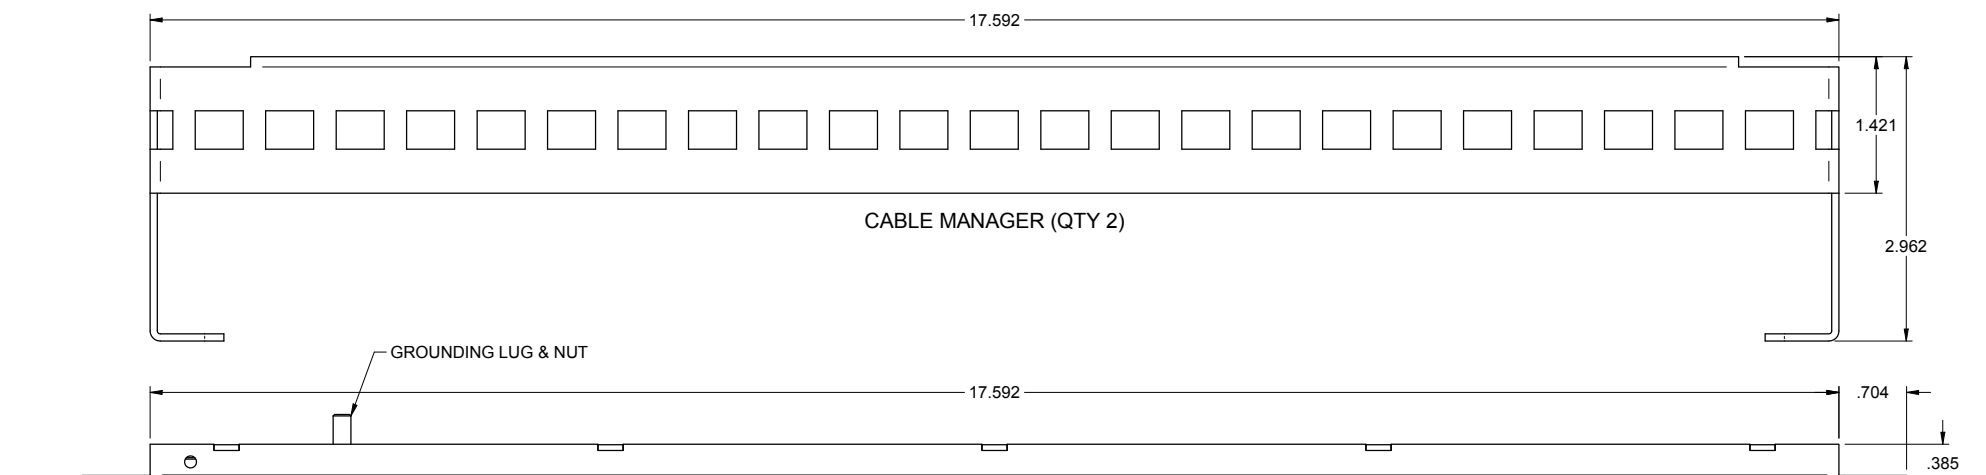


SPECIFICATIONS

FEATURES/MATERIALS:

- PROVIDES GROUNDED CAPABILITY FOR SHIELDED JACKS.
- METAL SHEETS: CORROSION RESISTANT STEELS OFFER BETTER MAGNETIC FIELD INTERFERENCE SHIELDING AS ELECTRIC FIELD SHIELDING. 1.60mm THICK, IVORY OR BLACK METAL PAINT.
- EXTRUDED AIRCRAFT GRADE ALUMINUM OR COLD ROLLED STEEL.
- WRITABLE AND ERASABLE MARKING SURFACE FOR EACH PORT ON THE FRONT PANEL.
- GROUND WIRE: 16 AWG WITH TERMINALS, 450mm
- JACK/INSERTS PANEL MOUNTING DIMENSIONS: 0.580" WIDTH X 0.770" HEIGHT
- UL LISTED
- CSA CERTIFIED

"OPTICAL CABLE CORPORATION (OCC) RESERVES THE RIGHT TO REVISE ANY PATCH PANEL SPECIFICATIONS."

UNCONTROLLED COPY



AK48STP		PATCH PANEL, 48 PORT, SHIELDED, KMJ PANEL	
OCC PART NO.		DESCRIPTION	
UNCONTROLLED COPY			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32 ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"		THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.	
MATERIAL SEE BILL OF MATERIAL	DRAWN D.A.HOLBERT	DATE 7/16/01	DWG TITLE CUSTOMER DRAWING, PATCH PANEL, 48 PORT, KMJ PANEL, SHIELDED
	CHECKED R.B.SMITH	DATE 11/15/01	SIZE C DWG NO. C104993
	ENGINEER J.YANIK	DATE 7/16/01	SCALE: NONE SHEET 1 OF 1
	APPROVED J.CALLOWAY	DATE 10/3/14	REV C
FINISH SEE NOTES	PREVIOUS DWG	FILENAME C104993C.dft	
	NEXT DWG		

