




FEATURES:

- ENCLOSURE BODY AND SLIDING TRAY CONSTRUCTED OF 18 GA STEEL; POWDER COATED BLACK.
- LIQUID TIGHT FITTINGS ACCOMODATE CABLE DIAMETERS FROM .250" TO .485".
- METAL DIN RAIL CLIP MOUNTABLE ON REAR AND RIGHT SIDE OF ENCLOSURE. DESIGNED FOR 35MM DIN RAILS ONLY.
- LEGACY PLASTIC DIN RAIL CLIPS AVAILABLE, BUT SOLD SEPERATELY. (ACCOMMODATE 35MM AND 32MM DIN RAILS)
- HARDWARE KIT FEATURES HOOK AND LOOP STRIPS AND MAGNETIC SPLICE HOLDER COMPONENTS FOR FIBER MANAGEMENT.


"OPTICAL CABLE CORPORATION (OCC)
RESERVES THE RIGHT TO REVISE ANY
AND ALL DESIGN SPECIFICATIONS."
UNCONTROLLED COPY

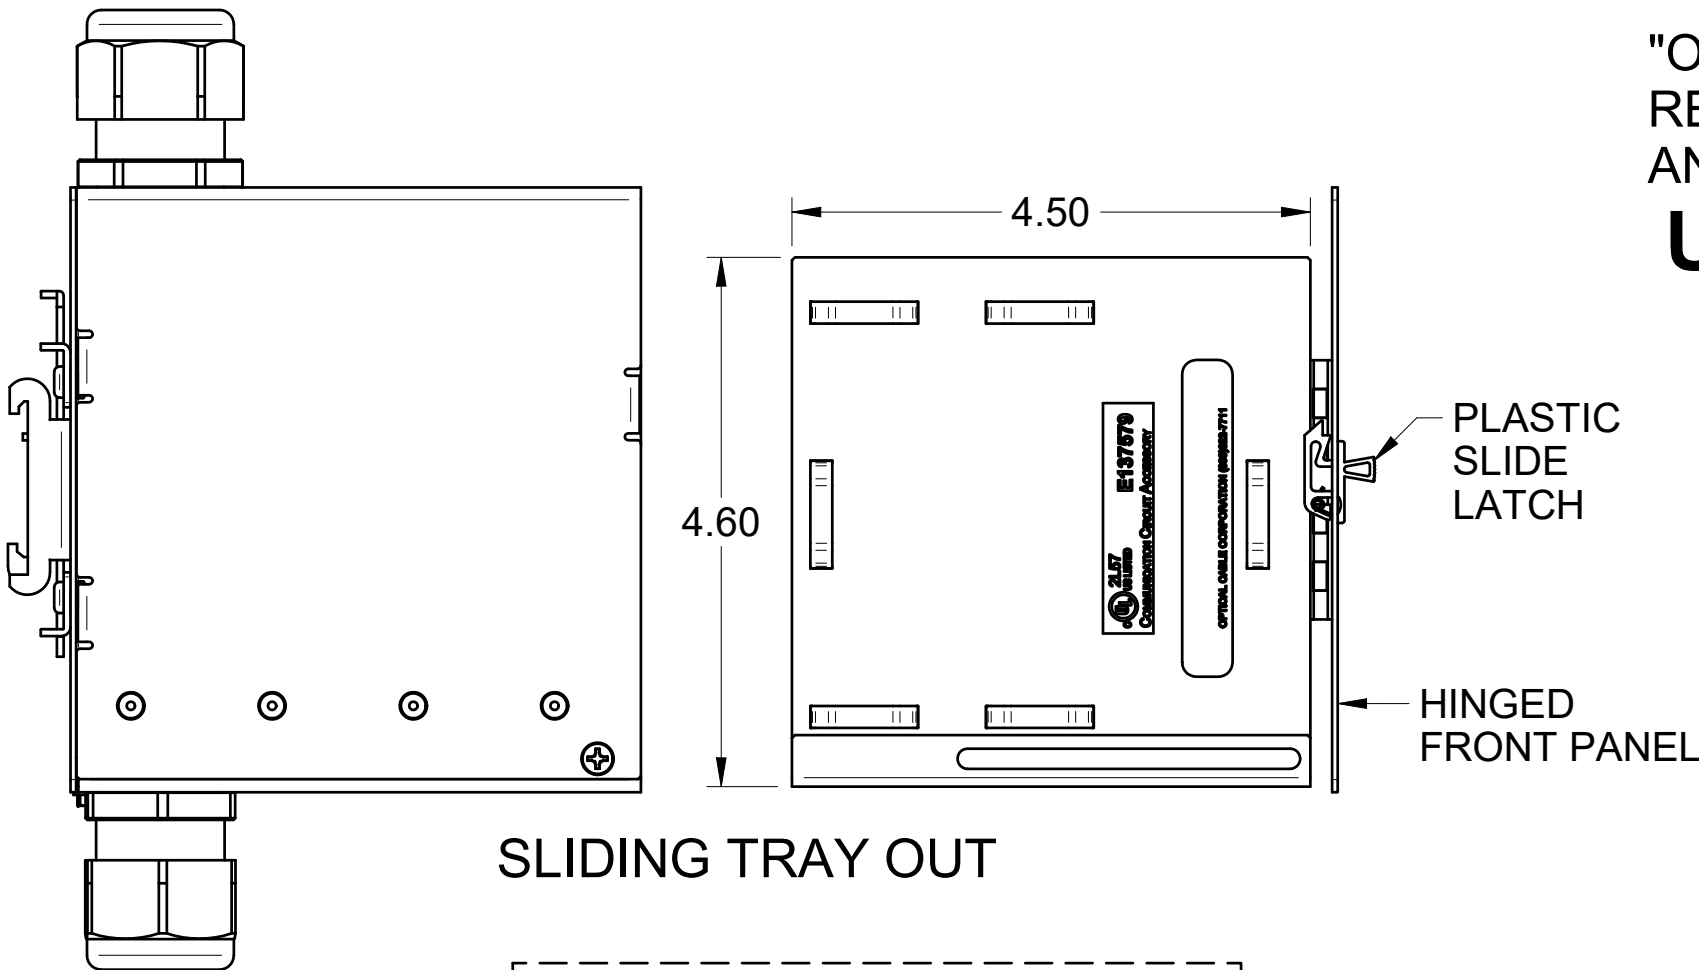


SLIDING TRAY OUT

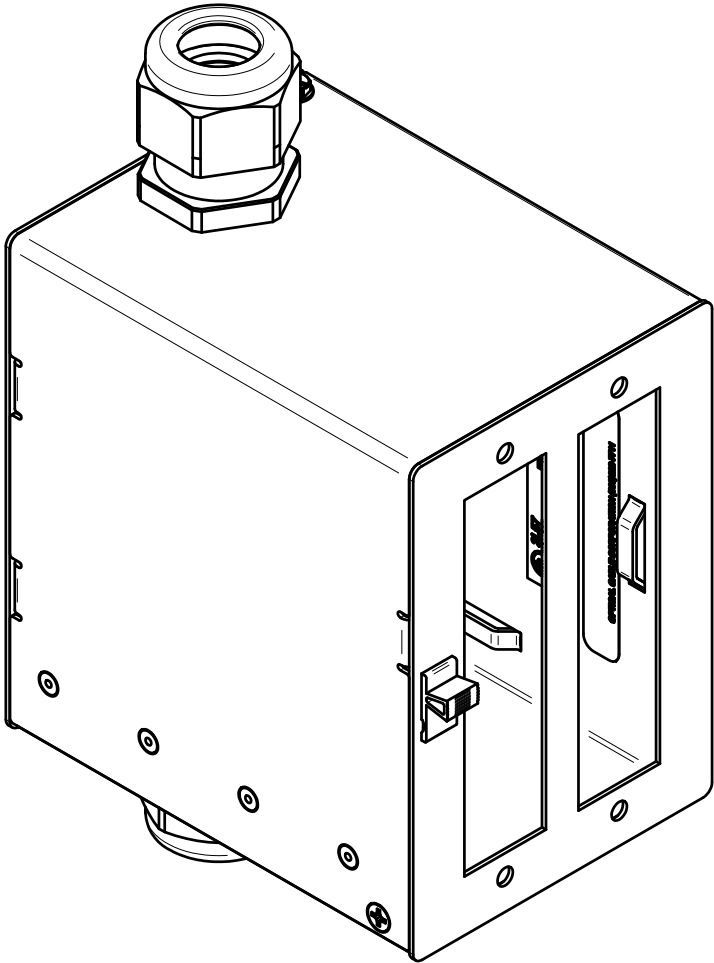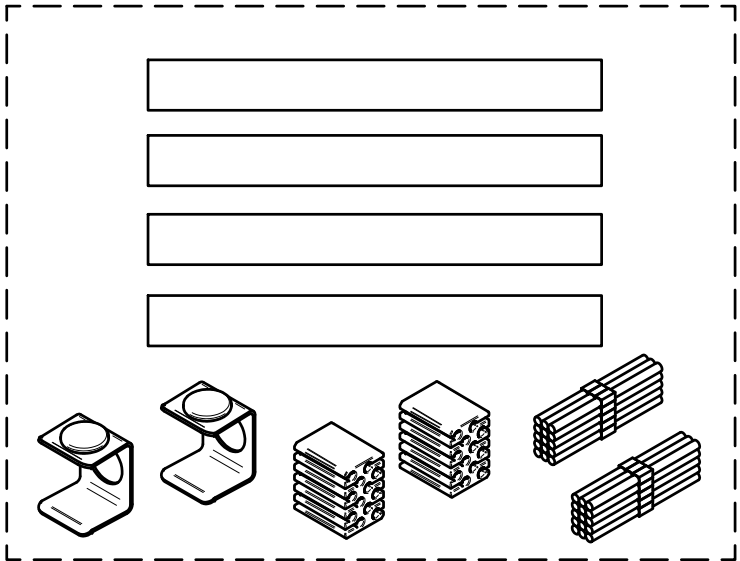


FRONT ISOMETRIC VIEW

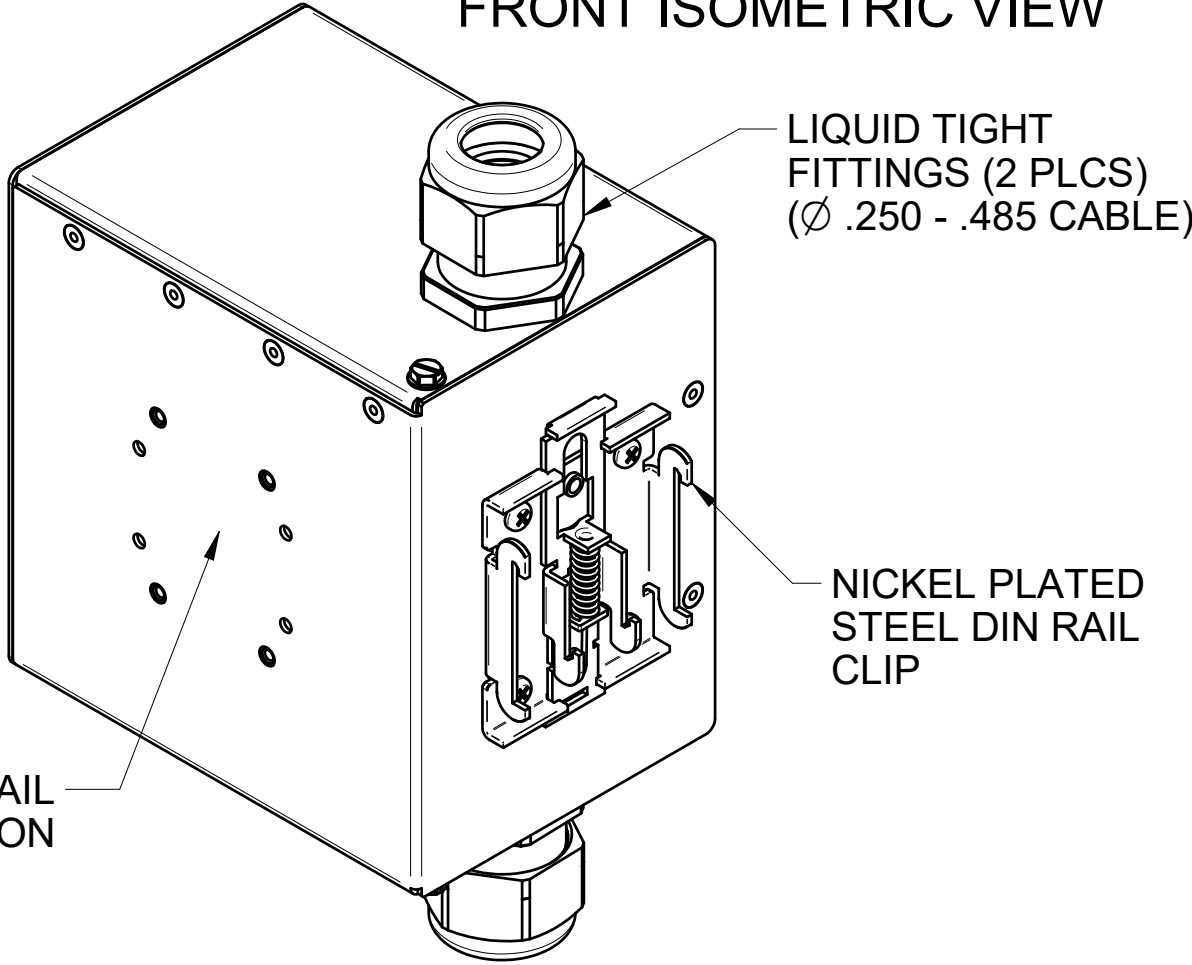


REAR ISOMETRIC VIEW

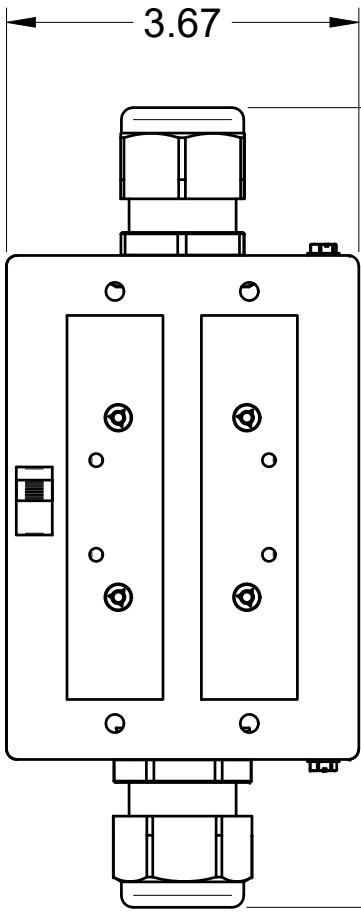


FRONT VIEW

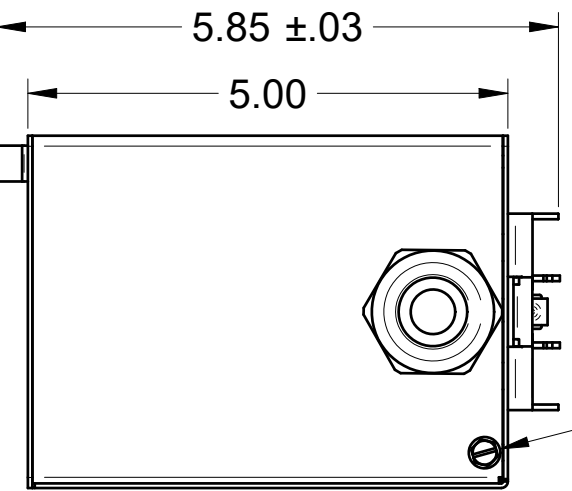


TOP VIEW

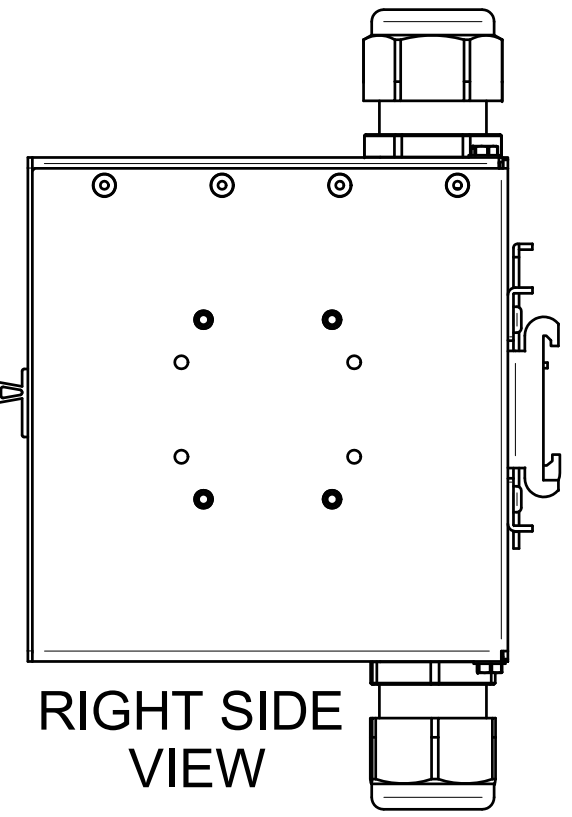

RIGHT SIDE VIEW

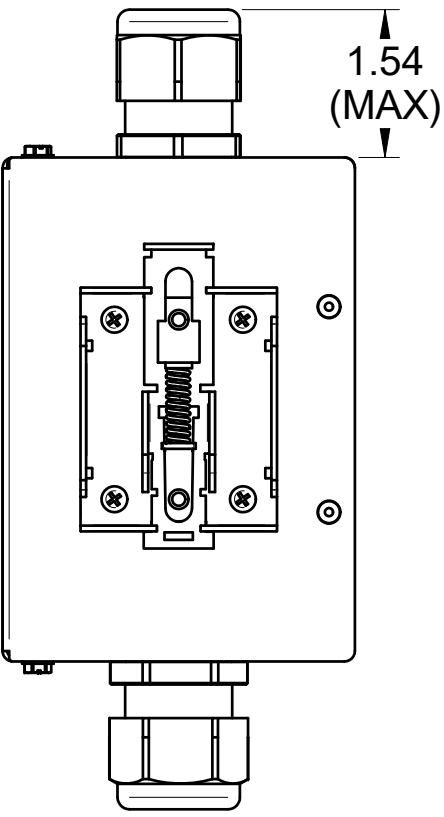

REAR VIEW

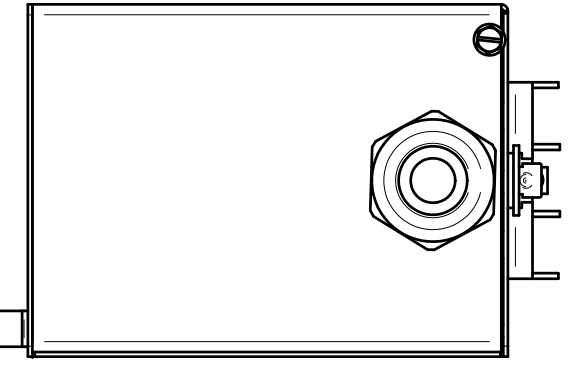


BOTTOM VIEW

ALTERNATE DIN RAIL
CLIP MOUNTING LOCATION

THIRD ANGLE PROJECTION	
CRITICAL DIMENSION CODE (F) = FUNCTION (M) = MATING (A) = AUDIT	

DTC2APG	CABINET, DIN RAIL, 2 ADPTR PLT, BLK, CBL FITTINGS		
OCC PART NO.	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/16" 2 PLACE DECIMALS ±.02"		THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.	
DRAWN	D.A.HOLBERT	DATE	5/15/12
CHECKED	J.HOWE	DATE	12/16/12
ENGINEER	J.YANIK	DATE	5/15/12
APPROVED	J.HOWE	DATE	6/19/24
PREVIOUS DWG			
NEXT DWG		FILENAME	C112089E.dft
MATERIAL BODY AND TRAY: 18 GA. STEEL DIN RAIL CLIP: NCKL PLTD STEEL GROMMETS: ELASTOMER		DWG TITLE DIN RAIL ENCLOSURE, 2 ADAPTER PLATE, WITH CABLE FITTINGS	
FINISH BODY AND TRAY: BLACK POWDER COAT PER OCC SPEC# 100025		SIZE C	DWG NO. C112089
		SCALE: NONE	REV E
		SHEET 1 OF 1	



33 Superior Way
Swannanoa, NC 28778
Phone: 828-298-2260
Fax: 828-298-2487
www.occfiber.com

PROPRIETARY AND CONFIDENTIAL