


Part #: CX008HBAA9KP

**1 Channel (2 Fiber)
SMPTE 311 Hybrid Cable
Plenum Rated**

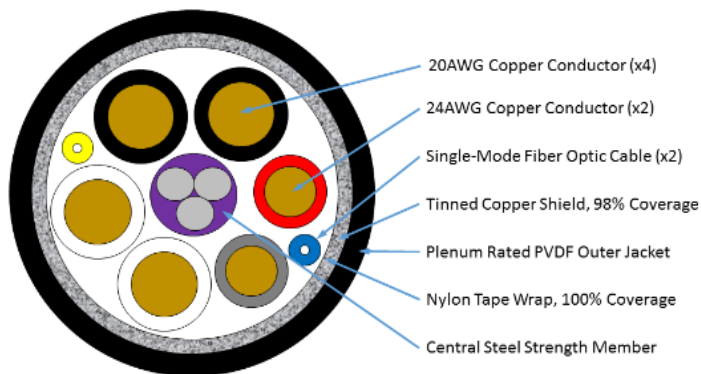

Laser Ultra-Fox™ Fiber Performance

Fiber Code/Count	SLA/2
Industry Standard Designation	Bend Tolerant Single-mode ITU-T G.657.A1 ITU-T G.652.D (Yellow and Blue)
Core/Cladding Diameter (µm)	9/125
Wavelength (nm)	1310/1550
Maximum Cable Attenuation (dB/km)	0.5/0.5
Primary Coating Diameter (µm)	245
Secondary Buffer Diameter (µm)	900
Zero Dispersion Slope (ps/nm ² -km)	0.092
Proof Test Level (kpsi)	100

Conductors

	20 AWG 19 Strand Class C Annealed Tinned Copper PE Insulated 300V
1	Black
2	Black /White
3	White/Black
4	White
	24 AWG 7 Strand Class B Annealed Tinned Copper PE Insulated 300V
5	Red
6	Gray

Cable Characteristics

Jacket Color	Black
Jacket Material	Plenum Rated PVDF
Buffer Material	Hard Elastomer
Subunit OD	0.9 mm
Cable Weight	121 kg/km (81 lbs/1000')
Cable Diameter	6.9 mm (0.27 in)
Strength Member	16 AWG Galvanized Steel PVDF Insulated - Purple

Print

```
<XXXXXXFT> OPTICAL CABLE CORPORATION -  
BROADCAST HDTV SMPTE COMPATIBLE 311 -  
CX008HBAA9KP - PLENUM TYPE CMP C(UL)US E132512  
- SINGLE-MODE G.657.A1 - <WO####>  
WWW.OCCFIBER.COM 1-540-265-0690 <DD-MM-YYYY  
> TO CAMERA >>>>>
```