




"OPTICAL CABLE CORPORATION (OCC)
RESERVES THE RIGHT TO REVISE ANY
AND ALL DESIGN SPECIFICATIONS."

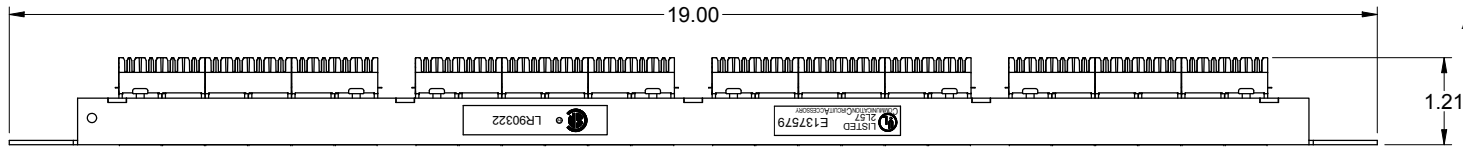


TOP VIEW

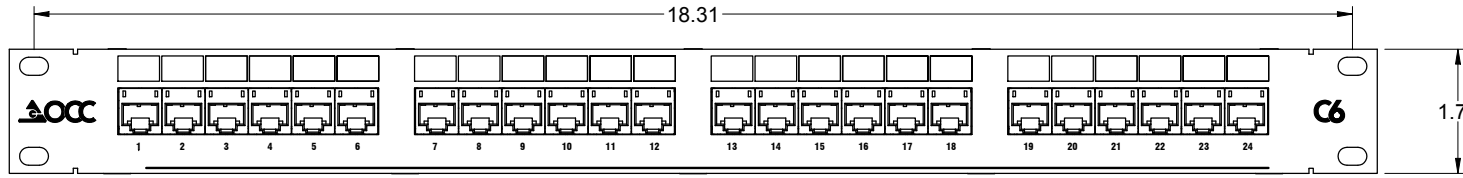


FRONT VIEW (24 PORT)

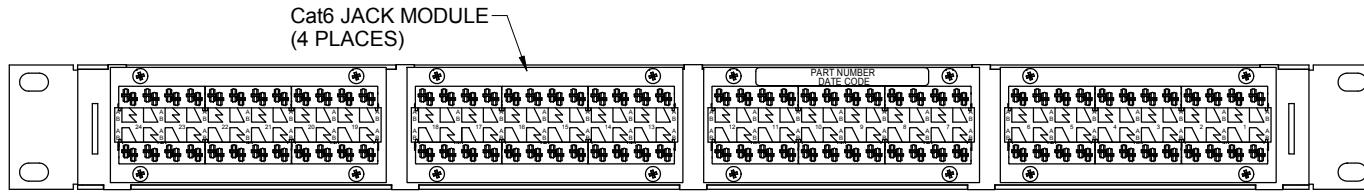

BACK VIEW (ROTATED 180° DEGREES)

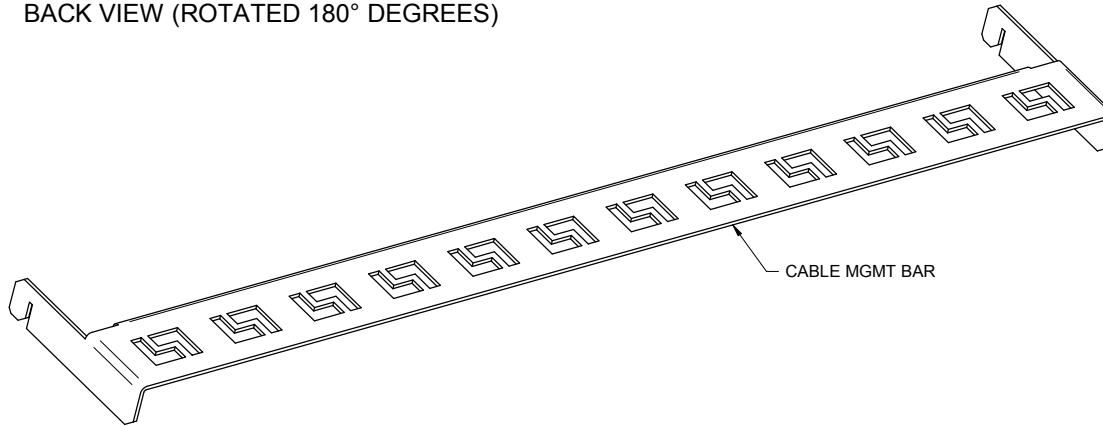

8 POSITION MODULAR JACK

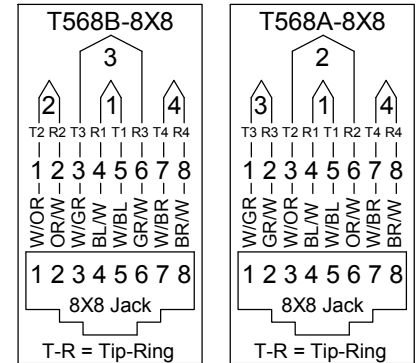

APPLICATIONS:

- ANALOG VOICE / VOIP / IPTV
- 10 / 100 / 1000 BASE-T ETHERNET
- IEEE 802.3 AF / AT PoE

SPECIFICATIONS:

- ANSI / TIA-568-C.2 CATEGORY 6
- ANSI / TIA-968-A
- IEC 60603-7

MATERIALS:

- PANEL: BLACK POWDER COAT, 16 AWG STEEL
- CABLE MANAGEMENT BARS, BLACK POWDER COAT, 16 AWG STEEL

- KIT INCLUDES THE FOLLOWING:

- (6) 3.6 " NYLON CABLE TIES
- (4) BLACK 12-24 PAN HEAD SCREWS
- (1) CABLE MANAGEMENT BAR

UNCONTROLLED COPY

DCC2488/110SIX	PATCH PANEL, 24 PORT, Cat6, 6PK MOD, OCC	
OCC PART NO.	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.	
TOLERANCES: FRACTIONS: ±1/32" ANGLES: ±1° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"	DATE 6/21/01	DATE 5/18/04
MATERIAL SEE NOTES	DRAWN D.A.HOLBERT	DATE 6/21/01
THIRD ANGLE PROJECTION	CHECKED STIKELATHER	DATE 5/18/04
CRITICAL DIMENSION CODE	ENGINEER J.YANIK	DATE 6/21/01
① = FUNCTION	APPROVED J. CALLOWAY	DATE 11/20/14
② = MATING	PREVIOUS DWG	FILENAME C104760J.dft
③ = AUDIT	NEXT DWG	SCALE: NONE
	SIZE C	SHEET 1 OF 1



**CUSTOMER DRAWING, OCC,
PATCH PANEL, 24 PORT, Cat6**

DWG NO. **C104760** REV J