

DZ-SERIES CABLE: WHERE RELIABILITY & VALUE MEET

OFFERING THE DURABILITY YOU
EXPECT FROM OCC.

These Distribution cables provide all of the indispensable elements needed for Indoor and Indoor/Outdoor commercial applications, while providing great value.

The DZ-Series offers a Distribution construction of 900µm buffered fibers and all the performance elements to meet structured cabling standards. The DZ-Series is suited for applications ranging from Indoor Installations to Indoor/Outdoor uses. The OCC DZ-Series of cables provides the perfect balance between value and performance. OCC still offers our DX-Series Distribution cables that exceed structured cabling standards.




Features:

- > Available in Indoor/Outdoor Riser (OFNR), and Plenum (OFNP)
- > Available in 4-24 Fibers
- > Colors Available: Aqua, Black, Orange, and Yellow
- > ICEA S-104-696
- > Water Blocked
- > -40°C to + 70°C Operating Temperature Range
- > ROHS & Reach
- > Bend Insensitive Fibers are Standard


Benefits:

- > Ease of Termination
- > Product in Inventory / Short Lead Time
- > Lightweight
- > Designed & Manufactured in the USA
- > A Versatile Choice for Indoor/Outdoor Use
- > Quick Shipping available if ordered by 12p.m. EST.

12 Fiber DZ-Series Cable

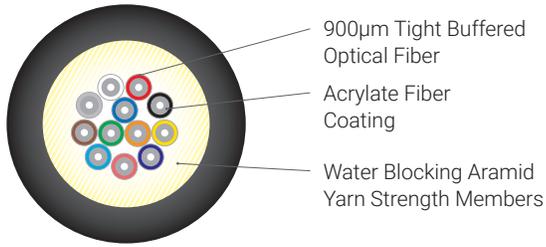

24 Fiber DZ-Series Cable

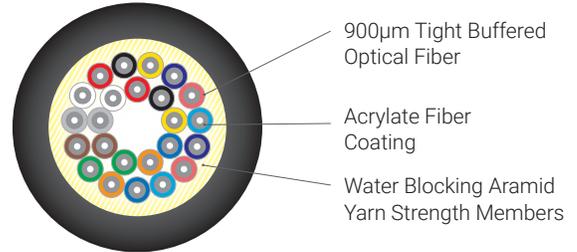

DZ-SERIES CABLE Characteristics

DX-SERIES CABLE Characteristics

INSTALLATION TENSILE LOAD	≤12 Fibers 150lb, >12 fibers 300lb	2x for greater pull strength
ARAMID YARN COVERAGE	Standard	2x for greater fiber protection
TEMPERATURE PERFORMANCE	-40°C to 70°C	-40°C to 85°C
FIBER COUNTS	4-24 Fibers	2-144 Fibers
CONFIGURATIONS	Riser, Plenum	Riser, Plenum, LSZH, armored options, chemical resistant, and OSP


Please refer to the OCC Website for more detailed mechanical and performance specifications.

Ordering Information

Digit No:	D	Z				T				9		P
1	2	3	4	5	6	7	8	9	10	11	12	
1-2	Distribution Series Ultra-Fox = DZ											
3-5	Fiber count = 004-024											
6	Jacket type: Indoor/Outdoor PVC = D Indoor/Outdoor Low smoke PVC = T											
7-9	Fiber type: (WLS, ALT, ALE, SLX)											
10	Ultra-Fox fiber with 900µm tight-buffer = 9											
11	Standard jacket color: Any Fiber Type: Black = K Multimode (WLS): Orange = O 10 Gigabit multimode (ALT, ALE): Aqua = Q Single-mode (SLX): Yellow = Y											
12	Rating: Riser = R, Plenum = P											

12-fiber indoor/outdoor plenum cable using Laser Ultra-Fox™ Low water peak, bend insensitive, single-mode fiber, plenum rated, yellow jacket

Example D Z 0 1 2 T S L X 9 Y P

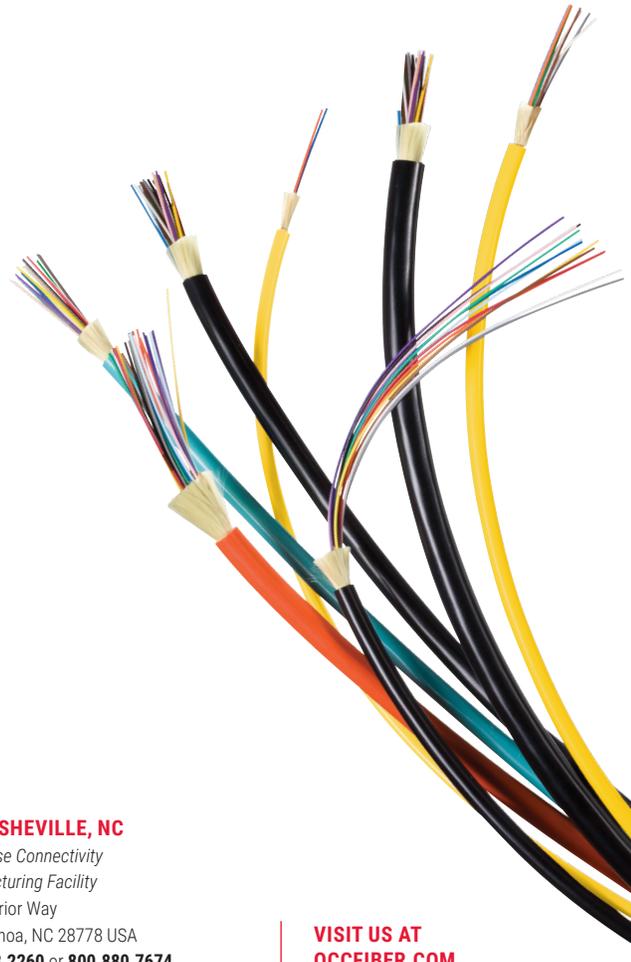

OCC ROANOKE, VA

Corporate Headquarters and Fiber Optic Cable Manufacturing Facility
5290 Concourse Drive
Roanoke, VA 24019 USA
540.265.0690 or 800.622.7711

OCC DALLAS, TX

Harsh Environment and Specialty Connectivity Manufacturing Facility
1700 Capital Avenue, Suite 150
Plano, TX 75074 USA
972.509.1500 or 877.509.1500

OCC ASHEVILLE, NC

Enterprise Connectivity Manufacturing Facility
33 Superior Way
Swannanoa, NC 28778 USA
828.298.2260 or 800.880.7674

VISIT US AT
OCCFIBER.COM