

SPECIFICATIONS

- DESCRIPTION:** CATEGORY 6 HIGH PERFORMANCE CABLE, CONSISTING OF 4 PAIRS, 23 AWG, UNSHIELDED WITH A LOW SMOKE PVC JACKET. c(UL)us CMP. PACKAGING TYPE: BOX
- CONDUCTOR:** 23 AWG SOLID BARE COPPER (.0224" NOM OD)
INSULATION: FEP .038" - .042" NOM OD, .0078" - .0096" AVG WALL
- PAIRING:** COMPONENTS ARE TWISTED INTO PAIRS WITH VARYING LEFT HAND LAYS TO MINIMIZE CROSSTALK.

PAIR #	COLOR
1	BLU PAIRED WITH WHT/BLU
2	ORG PAIRED WITH WHT/ORG
3	GRN PAIRED WITH WHT/GRN
4	BRN PAIRED WITH WHT/BRN
- CABLING:** THE FOUR (4) TWISTED PAIRS ARE CABLED AROUND AN ISOLATOR WITH A LEFT HAND LAY.
- OVERALL JACKET:** LOW SMOKE PVC, SEE COLOR TABLE FOR CABLE COLOR.
.222" NOM OD -
.019" AVERAGE WALL THICKNESS
- MARKING:** THE CABLE IS IDENTIFIED WITH THE FOLLOWING PRINT LEGEND:
OCC (WWW.OCCFIBER.COM) P/N OCC-U64HPLM --- ETL
VERIFIED CATEGORY 6, 4 PR 23 AWG CMP C(UL)US OCCV
E322888 MADE IN USA MYLLDDS XXXXX FT

WHERE: MYLLDDS = TRACEABILITY CODE
XXXXX FT = SEQUENTIAL FOOTAGE MARKINGS

- AGENCY APPROVAL:** UNDERWRITERS LABORATORIES, INC. TYPE CMP COMMUNICATIONS PLENUM CABLE LISTED AS BEING SUITABLE FOR USE IN DUCTS, PLENUMS, AND OTHER SPACES USED FOR ENVIRONMENTAL AIR. ALSO LISTED AS HAVING FIRE-RESISTANT AND LOW SMOKE-PRODUCING CHARACTERISTICS, IN ACCORDANCE WITH ARTICLE 800 OF THE NATIONAL ELECTRICAL CODE.

8. ELECTRICAL CHARACTERISTICS*:

CHARACTERISTIC IMPEDANCE: 100 Ω
 MAXIMUM CONDUCTOR RESISTANCE: 8.00 Ω/100 METERS
 MAXIMUM RESISTANCE UNBALANCED: 5%
 MAXIMUM MUTUAL CAPACITANCE: 5.6 nF/100 METERS @ 1kHz.
 MAXIMUM DELAY SKEW: 45 ns/100 METERS
 NOMINAL VELOCITY OF PROPAGATION: 75%
 INSTALLATION TEMPERATURE RANGE: 0°C +60°C
 OPERATING TEMPERATURE RANGE: -20°C +60°C

* DISCRETE VALUES ARE FOR INFORMATION ONLY. EQUATIONS FOR SWEPT FREQUENCIES GOVERN LIMITS. VERIFIED TO MEET CAT 6 TIA-568-C.2 PERFORMANCE REQUIREMENTS PER THE VERIFICATION REQUIREMENTS DEFINED IN MANUFACTURERS UL/ETL FILE(S).

- CABLE COMPLIES TO E.U. RoHS DIRECTIVE 2002/95/EC


ELECTRICAL PERFORMANCE

TRANSMISSION SPECIFICATIONS

TIA-568-C.2 CATEGORY 6 VERIFIED
ISO/IEC 11801, 2ND ED. CLASS E COMPLIANT

Frequency (MHz.)	INSERTION LOSS MAX. (dB/100 m)		NEXT LOSS MIN. (dB)		ACR MIN. (dB)		PSNEXT LOSS MIN. (dB)		PSACR MIN. (dB)		ACRF MIN. (dB)		PSACRF MIN. (dB)		RL MIN. (dB)	
	TIA Std	Typical	TIA Std	Typical	TIA Std	Typical	TIA Std	Typical	TIA Std	Typical	TIA Std	Typical	TIA Std	Typical	TIA Std	Typical
1	2	1.8	74.3	92	72.3	90.3	72.3	89	70.3	87.3	67.8	85.1	64.8	82.1	20	32
4	3.8	3.6	65.3	82.3	61.5	78.7	63.3	79.3	59.5	75.7	55.8	72.6	52.8	69.6	23	30
8	5.3	5.1	60.8	77.5	55.4	72.3	58.8	74.5	53.4	69.3	49.7	66.4	46.7	63.4	24.5	34.3
10	6	5.8	59.3	75.9	53.3	70.1	57.3	72.9	51.3	67.1	47.8	64.4	44.8	61.4	25	34.9
16	7.6	7.4	56.2	72.6	48.7	65.3	54.2	69.6	46.7	62.3	43.7	60.2	40.7	57.2	25	35.2
20	8.5	8.3	54.8	71.1	46.3	62.8	52.8	68.1	44.3	59.8	41.8	58.2	38.8	55.2	25	35
25	9.5	9.3	53.3	69.5	43.8	60.2	51.3	66.5	41.8	57.2	39.8	56.1	36.8	53.1	24.3	36.1
31.25	10.7	10.4	51.9	67.9	41.2	57.5	49.9	64.9	39.2	54.5	37.9	54.1	34.9	51.1	23.6	35.5
62.5	15.4	15	47.4	63.1	32	48.1	45.4	60.1	30	45.1	31.9	47.9	28.9	44.9	21.5	33.2
100	19.8	19.1	44.3	59.8	24.5	40.7	42.3	56.8	22.5	37.7	27.8	43.7	24.8	40.7	20.1	31.6
155	25.2	24	41.4	56.7	16.3	32.8	39.4	53.7	14.3	29.8	24	39.7	21	36.7	18.8	30.2
200	29	27.3	39.8	55	10.8	27.6	37.8	52	8.8	24.6	21.8	37.4	18.8	34.4	18	29.3
250	32.8	30.7	38.3	53.4	5.5	22.7	36.3	50.4	3.5	19.7	19.8	35.4	16.8	32.4	17.3	28.6
300		33.7		52.1		18.4		49.1		15.4		33.8		30.8		28
350		36.6		51		14.5		48		11.5		32.4		29.4		27.5
400		39.2		50.1		10.9		47.1		7.9		31.2		28.2		27.1
500		44		48.5		4.6		45.5		1.6		29.2		26.2		26.3
550		46.2		47.9		1.7		44.9		NS		28.3		25.3		26
650		50.4		46.7		NS		43.7		NS		26.8		23.8		25.4

*FREQUENCIES BEYOND THE TIA AND ISO REQUIREMENTS ARE FOR INFORMATION ONLY. ALL VALUES ARE dB/100 METERS.

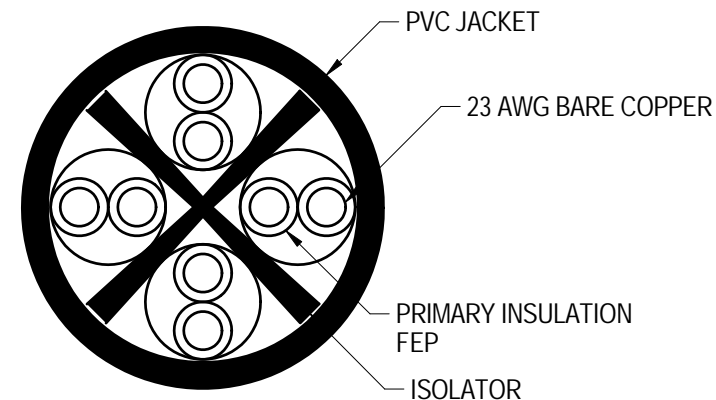

CABLE COLOR TABLE

OCC-U64HPLM-01	YELLOW
OCC-U64HPLM-05	BLUE
OCC-U64HPLM-07	WHITE
OCC PART NUMBER	JACKET COLOR

THIRD ANGLE PROJECTION 	MATERIAL SEE NOTES AND TABLES	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"		THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.		33 Superior Way Swannanoa, NC 28778 Phone: 828-298-2260 Fax: 828-298-2487 www.occfiber.com
		DRAWN D.A.HOLBERT CHECKED J.HOWE ENGINEER J.YANIK APPROVED J. Calloway PREVIOUS DWG NEXT DWG	DATE 5/5/14 DATE 5/6/14 DATE 5/5/14 DATE 7/17/15	DWG TITLE CABLE, CAT6, 23AWG, 4PR, UNSHIELDED, PLENUM, CMP, HIGH PERFORMANCE		

"OPTICAL CABLE CORPORATION (OCC) RESERVES THE RIGHT TO REVISE ANY CABLE SPECIFICATIONS."

UNCONTROLLED COPY