




**SPECIFICATIONS:**

- TRANSMISSION PERFORMANCE: MEETS ALL REQUIREMENTS SPECIFIED IN ANSI/TIA-568.2 FOR CATEGORY 6A CHANNELS.
- ENVIRONMENTAL RANGE:
  - TEMPERATURE RANGE:
  - STORAGE -40 TO 70° C
  - OPERATIONAL -10 TO 80° C
- RELATIVE HUMIDITY (OPERATIONAL) MAXIMUM NONCONDENSING 93%
- ELECTRICAL:
  - INSULATION RESISTANCE: 1MΩ MIN.
  - DIELECTRIC WITHSTAND VOLTAGE: 1000 VAC RMS, 1 MIN.
  - CONTACT RESISTANCE: 2 mΩ MAX.
  - CURRENT RATING: 1.5 AMPS AT 20°C
- MATERIAL SPECS:
  - HOUSING: ZINC ALLOY, FULLY PLATED.
  - SPRING WIRE/CONTACT BLADES MATERIAL: PHOSPHOR BRONZE ALLOY PLATED WITH 50 MICRO-INCH OF GOLD.
  - INSERTIONS / WITHDRAWALS: ≥ 750


"OPTICAL CABLE CORPORATION (OCC) RESERVES THE RIGHT TO REVISE ANY AND ALL DESIGN SPECIFICATIONS."  
**UNCONTROLLED COPY**

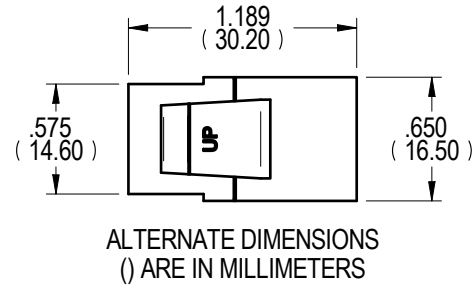


FRONT




RIGHT SIDE



BACK



BOTTOM



ISOMETRIC VIEW  
(SHIELDED) KMJ

THIRD ANGLE PROJECTION	
CRITICAL DIMENSION CODE	(F) = FUNCTION (M) = MATING (A) = AUDIT

KMJ6ASFT	ASSY, ADAPTER, KMJ, FEED-THRU, CAT 6A, SHIELDED, WIRED A/B						
OCC PART NUMBER	DESCRIPTION						
<b>UNCONTROLLED COPY</b>			<b>CUSTOMER DRAWING</b>				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"	THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.		33 Superior Way Swannanoa, NC 28778 Phone: 828-298-2260 Fax: 828-298-2487 www.occfiber.com				
MATERIAL SEE BILL OF MATERIAL	DRAWN D.A.HOLBERT	DATE 2/18/21				DWG TITLE	
FINISH SEE NOTES	CHECKED J.HOWE	DATE 2/22/21				ASSY, ADAPTER, KMJ, SHIELDED, CAT 6A, WIRED A/B	
	ENGINEER J.YANIK	DATE 2/18/21				SIZE B	DWG NO. <b>C113592</b>
	APPROVED J.CALLOWAY	DATE 2/24/21				REV A	
	PREVIOUS DWG		SCALE: 1:1	SHEET 1 OF 1			
	NEXT DWG	FILENAME C113592A.dft					