


THIRD ANGLE PROJECTION 



CRITICAL DIMENSION CODE
 (F) = FUNCTION
 (M) = MATING
 (A) = AUDIT


"OPTICAL CABLE CORPORATION (OCC) RESERVES THE RIGHT TO REVISE ANY AND ALL DESIGN SPECIFICATIONS."

UNCONTROLLED COPY

NOTES: UNLESS OTHERWISE SPECIFIED.

- SUPPORTS: v1.2, v1.3, v1.4a, 720p, 1080p, HDCP
- MECHANICAL CHARACTERISTICS:
 OPERATING TEMP: -10°C ~ 60°C
 STORAGE: -40°C ~ 70°C
- ELECTRICAL CHARACTERISTICS:
 DIFFERENTIAL IMPEDANCE: 100Ω ± 10Ω
 CONTACT RESISTANCE: 2Ω MAXIMUM
 INSULATION RESISTANCE: 10MΩ MINIMUM
 WITHSTAND VOLTAGE: 0.1 SECOND 200VDC
 HIGH POTENTIAL (HIPOT): 200VAC / 1.0mA

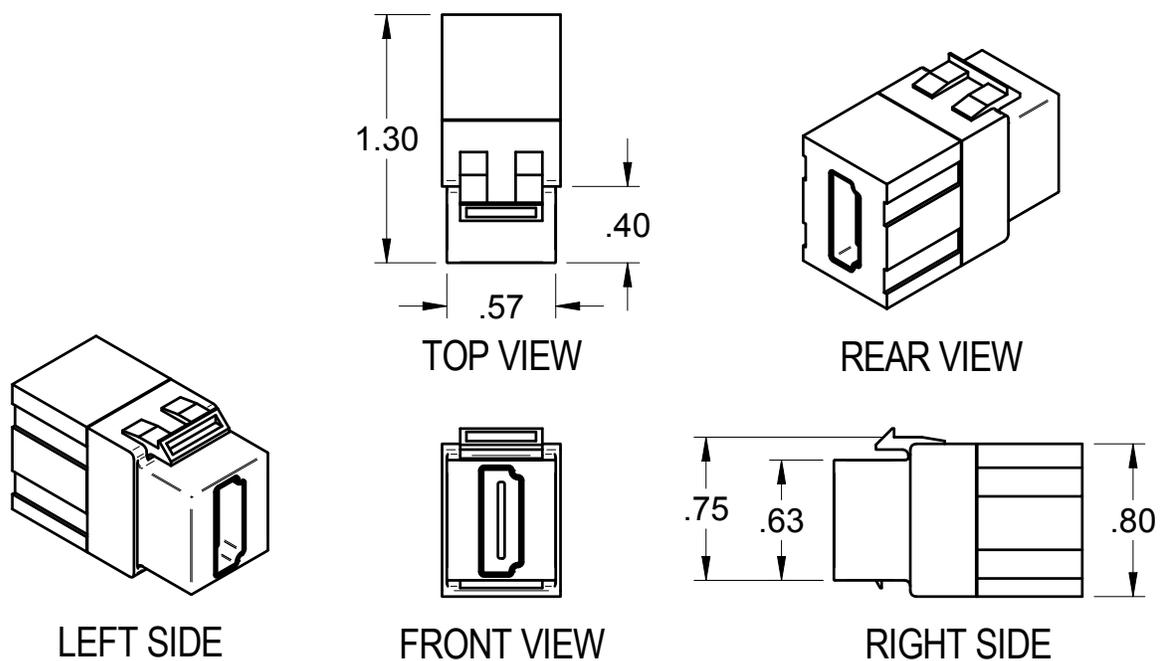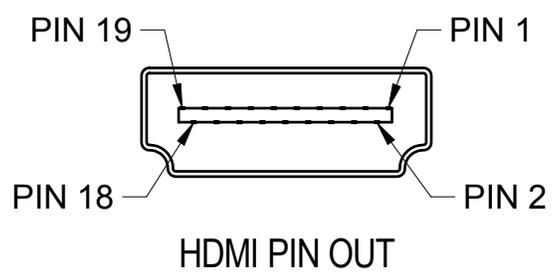

AKHDMI12		COUPLER, HDMI, KMJ MTG, BRIGHT WHITE, OCC		
OCC PART NO.		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"	THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.		 33 Superior Way Swannanoa, NC 28778 Phone: 828-298-2260 Fax: 828-298-2487 www.occfiber.com	
	DRAWN D.A.HOLBERT	DATE 11/1/12		DWG TITLE COUPLER, KMJ MTG, HDMI FEMALE - FEMALE, OCC
	CHECKED J.HOWE	DATE 11/5/12		
	ENGINEER J.YANIK	DATE 11/1/12		
	APPROVED J.CALLOWAY	DATE 9/2/20		
FINISH CONTACTS: 15 MICRO INCH GOLD PLATING	PREVIOUS DWG	FILENAME C111388A.dft	SIZE A DWG NO. C111388 SCALE: NONE SHEET 1 OF 1 REV A	